KODIAK

K10 DD COMBO DIGGER DERRICK

Power & Traction in Action

2 Man Bucket with 80 ft Reach!

Material Handling Jib

UTV International

KODIAK
K10 DD COMBO DIGGER DERRICK



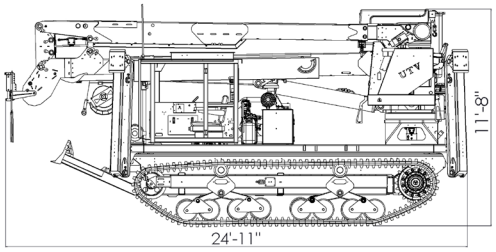

DIMENSIONS / WEIGHT	
Overall Length	299" with boom in storage position
Overall Width	102" with outriggers in storage position
Overall Height	138" with boom in storage position
Frame Height	53"
Ground Clearance	21"
Weight & Payload - Basic Vehicle - Payload	 39,000 lbs (Base vehicle with derrick) 3,000 lbs
Deck Area	42 ft² (approx. 72" x 84")
PERFORMANCE DATA	
Maximum speed	7.5 mph
Inside turning radius	0 ft.
Climbing Ability - Uphill - Side-hill	 35° (70%) 20° (36 %)
Ground Pressure (empty)	4.20 at 6" penetration
Ground Pressure (loaded)	5.32 at 6" penetration
Normal Driving Range	12 Hours (80 gallon fuel tank)
ENGINE	
Make	Kubota 09 Series
Model	V5009-TIE5
Type	4 cylinder, Tier 4, Turbo Charged Diesel
Displacement	5.0L
Horsepower	210 HP at 2,050 RPM
Torque	651 ft-lbs at 1,500 RPM
Muffler with spark arrestor	Yes
DEF Tank	10.5 gals.
FRAME / SUSPENSION	
Type	Corten Welded Tub
Axles	Walking beam with dual articulating bogie wheels
Wheels	Steel

Suspension system comes with:
- 2 independent idler wheels with oil bath hubs and steel face seals
- 16 steel double wheels, 14" diameter
- 2 x rear drive sprockets

TRACKS

One piece 28" rubber tracks with steel reinforcements

STEERING

Independent dual joysticks with cable control for each track

ELECTRICAL	
Voltage	12V 150 Amps
Battery Capacity	2 x 900 CCA
Alternator Capacity	95 Amps

OPTIONAL EQUIPMENT & ACCESSORIES

- Front 2 way plow
- Hydraulic winch 20,000, 25,000 & 30,000 lbs
- Side tool box
- Closed cab with heater
- Air conditioning
- Cab brush guards
- Additional lights
- Hydraulic tool outlets
- Pintle hook
- Cold start up
- Extreme cold start up kit
- Wooden side walls
- Hose reel on deck
- 12v DC emergency pump
- Additional parts & service manual

POWER TRAIN FOR HYDROSTATIC DRIVE	
Transmission	Hydrostatic, 2-speed
Parking Brakes	Multi-disc, spring applied & pressure released
Service Brakes	Positive deceleration via hydrostatic transmission

STANDARD FEATURES

- 1-Man Cab R.O.P.S.
- 2 Set of Parts & Service Manuals
- Intake heater for cold startup
- Engine block heater

CRANE SPECIFICATIONS

48 ft. sheave height
12,000 lbs capacity tip winch
Maximum Lifting Capacity 24,000 lbs with 2 part line
7/8" Nylon winch rope with swivel hook
Fully hydraulic 2nd and 3rd boom extension
4 way pole claw
Auger over storage protection
Auger digging radius 15' to 26'
12,000 Ft-lb 2 speed auger drive
Up to 36" auger storage
Four hydraulic radial outriggers
Level gauges on tower (2)

4th BOOM & BASKET SPECIFICATIONS

Folding 4th boom with 2-Man Basket
24" x 42" x 42" Fiberglass Basket with Step
Basket Capacity (Jib not in use) 550 lbs
Basket Capacity (Jib in use) 400 lbs
Max. Jib and Winch Capacity 1,000 lbs
Hydraulic Leveled Basket
Hydraulic Jib Tilt
180° Basket Rotator
Basket Rotator, Winch, and Jib Controls with Lockouts
Controls w/High Electrical Resistant Components
46 kVA Category "C" Insulated Radio control

4th BOOM & BASKET OPTIONS

Basket Liner w/Step
Vinyl Basket Cover with Lanyard
Tool Trays
Hydraulically Extendible Jib
Tool Circuit at Basket, Manual Control

OPTIONAL CRANE EQUIPMENT

- 16-24" Rock Auger
- 16-36" Dirt Auger
- 4'-8' Kelly bar

ACHIEVER RT-08 DD COMBO DIGGER DERRICK CRANE LOAD CHART

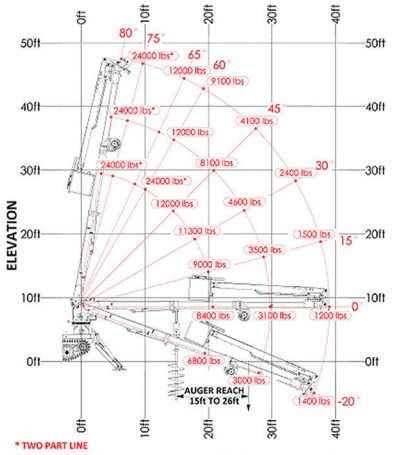

-Capacities based on 85% of vehicle tipping loads.
-All outriggers must be extended and set firmly on the ground.
-Vehicle MUST be leveled to within +/- 5° before operation.

ACHIEVER DPM-52MH TRACKED AERIAL | ACHIEVER RT-08 DD DIGGER DERRICK | ACHIEVER TRACKED CARRIERS | VOYAGER TRACKED CARRIERS | PIONEER PERSONNEL CARRIERS | HERCULES DIGGER DERRICKS

UTV International
8650 Darnley Road
Mont-Royal, Québec
Canada H4T 1M4

1-800-985-8665 | UTVINT.COM

SEPTEMBER 2019