


# ACHIEVER RT-08 DIGGER DERRICK CRANE LOAD CHART

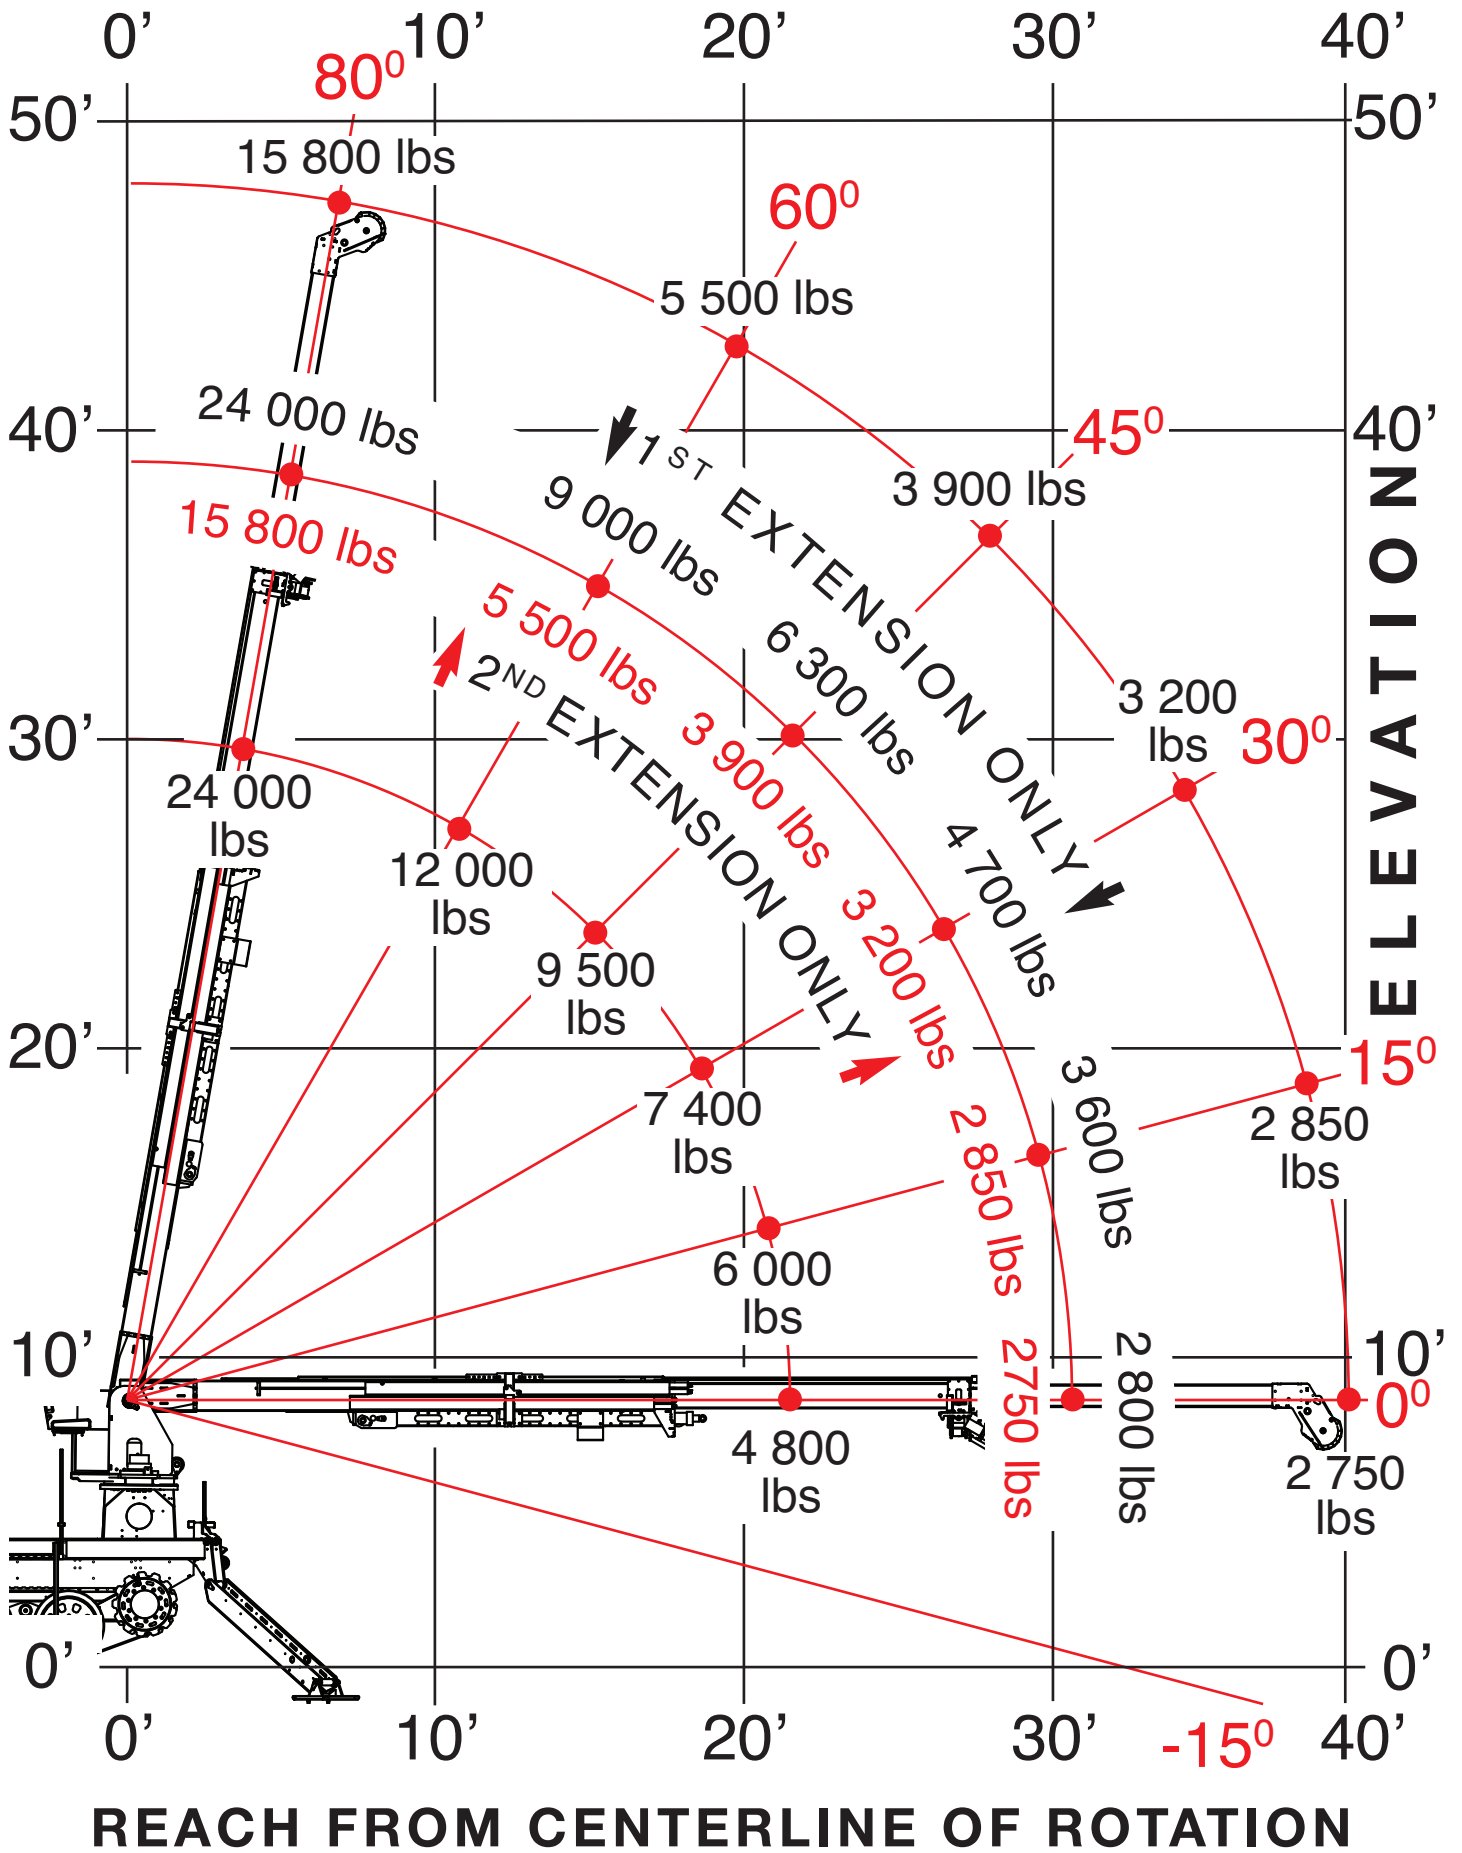

- Capacities based on 85% of vehicle tipping loads.
- All outriggers must be extended and set firmly on the ground.
- Vehicle **MUST** be leveled to within +/- 5° before operation.